

**405nm 30W Fiber Coupled Diode Laser**  
**K405EMSCN-30.00WN1N-40022**



**Features :**

- ◆ 405nm wavelength
- ◆ 30W output power
- ◆ 400μm fiber core diameter
- ◆ 0.22NA
- ◆ Cooling mode: water cooling
- ◆ Pluggable output

**Applications :**

- ◆ Laser Direct Writing
- ◆ Biological Detection
- ◆ 3D Printing

BWT, founded in 2003, is committed to the mission of "let the dream drive the light", the vision of becoming the "Global leader in laser solutions", and the value of "Outstanding innovation", providing diode laser, fiber laser, ultra-fast laser products and solutions to global customers.

The company pursues continuous innovation and insists on autonomous and controllable advanced process and technology. With Beijing headquarters as the core, BWT has successively established production and R&D centers in Jiangsu and Shenzhen, and invested in the construction of an intelligent and digital production base in Tianjin. To build a high level of technical strength and product quality, BWT set up a German subsidiary in 2020, introducing European quality standards, and taking a solid step for the internationalization of R&D, production and technological innovation.

Up to now, BWT has traded more than 10 million lasers worldwide. BWT's products are available in more than 70 countries and regions, with applications involving industry, medical, commercial, scientific research, information, and many other fields.

Version number	Change content	Change date
1.0	First edition	2021.09.17
1.1	UI upgrade	2021.10.08

## 405nm 30W Fiber Coupled Diode Laser

### K405EMSCN-30.00WN1N-40022

Specifications ( 25°C )		Symbol	Unit	K405EMSCN-30.00WN1N-40022		
				Minimum	Typical	Maximum
Optical Data <sup>(1)</sup>	CW Output Power	P <sub>O</sub>	W	30	-	-
	Center Wavelength <sup>(2)</sup>	λ <sub>c</sub>	nm	405±5		
	Electrical-to-Optical Efficiency	PE	%	-	25	-
	Operating Current	I <sub>op</sub>	A	-	0.45	0.54
	Threshold Current	I <sub>th</sub>	A	-	0.11	-
	Operating Voltage	V <sub>op</sub>	V	-	58	-
Fiber Data	Core Diameter	D <sub>core</sub>	μm	-	400	-
	Cladding Diameter	D <sub>clad</sub>	μm	-	440	-
	Numeric Aperture	NA	-	-	0.22	-
	Fiber Loose Tubing Diameter	-	mm	6mm stainless steel is a suggestion		
	Fiber length	Pluggable output, Fiber length is optional				
	Fiber Termination	Pluggable SMA905				
Others	Storage Temperature <sup>(2)</sup>	T <sub>st</sub>	°C	-20	-	70
	Lead Soldering Temp	T <sub>ls</sub>	°C	-	-	260
	Lead Soldering Time	t	sec	-	-	10
	Operating Case Temperature <sup>(3)</sup>	T <sub>op</sub>	°C	15	-	35
	Relative Humidity	RH	%	15	-	75
	Cooling Made	water cooling				
	Cooling Requirements	The water flow should be at least 2L/min.				


(1) Data measured under operation output at 30W@25°C.

(2) A non-condensing environment is required for operation and storage.

(3) Operating temperature defined by the package case. Acceptable operating range is 15°C~35°C, but performance may vary.

**405nm 30W Fiber Coupled Diode Laser**  
**K405EMSCN-30.00WN1N-40022**

**Package Dimensions (mm)**

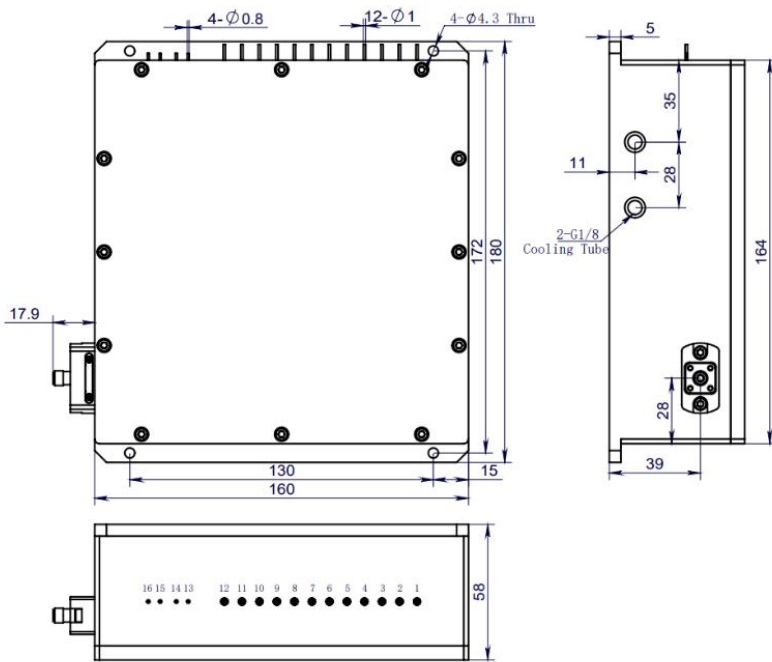

Pin	Function
1	LD1+
2	LD1-
3	LD2+
4	LD2-
5	LD3+
6	LD3-
7	LD4+
8	LD4-
9	LD5+
10	LD5-
11	LD6+
12	LD6-
13	Thermistor
14	Thermistor
15	NC
16	NC

## 405nm 30W Fiber Coupled Diode Laser

**K405EMSCN-30.00WN1N-40022**

### OPERATING NOTES

- ◆ Avoid eye and skin exposure to direct radiation during operation.
- ◆ ESD precautions must be taken during storage, transportation and operation.
- ◆ Short-circuit is required between pins during storage and transportation.
- ◆ Please connect pins to wires by solder instead of using socket when operation current is higher than 6A. Soldering point should be close to the middle of the pins. Soldering temperature should be lower than 260°C and time shorter than 10 second.
- ◆ Make sure the fiber output end is properly cleaned before operation of laser. Follow safety protocols to avoid injury when handling and cutting the fiber.
- ◆ Use constant current power supply to avoid surge current during operation.
- ◆ Laser diode must be used according to the specifications.
- ◆ Laser diode must work with good cooling.
- ◆ Operation temperature ranges from 15°C to 35°C .
- ◆ Storage temperature ranges from -20°C to +70°C .



**Declaration:** information and specifications contained herein are deemed to be reliable and accurate. BWT Beijing reserves the right to change, alter or modify the design and specifications of these products at any time without notice.21-1